
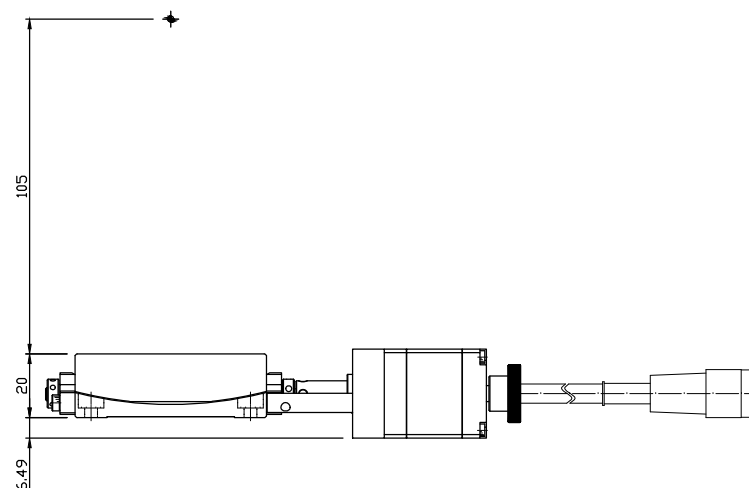

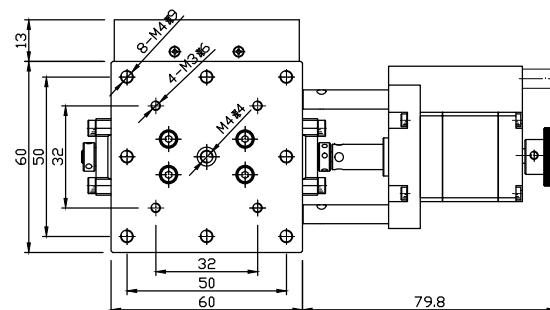
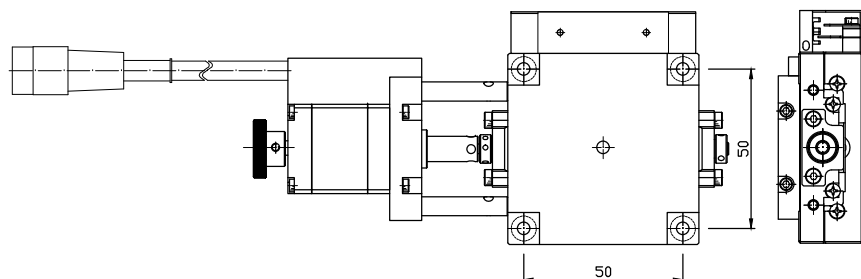



PHTM-60A105接线图

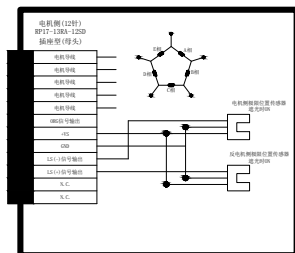

产品参数:
 型号: PHTM-60A105
 行程: $\pm 7^{\circ}$
 电机: PKP523N12B(东方马达)
 驱动结构: 蜗轮蜗杆
 传动比: 1:380
 主要材料: SUS440C淬火
 表面处理: 黑铬
 重量: 0.65Kg
 摆动中心高度: 105mm ± 0.1 mm
 摆动中心精度: $\phi 0.01$ mm以内
 分辨率(Full): 约0.00198°
 分辨率(Half): 约0.00095°
 最大速度: 6.6°/秒
 重复定位精度: $\pm 0.01^{\circ}$
 反向间隙: 小于0.02°
 承载能力: 29.4N(3.0Kgf)
 驱动电流: 1.2A